



AUXILIARY POWER UNIT SAFIR 5K/G Z8

Designed for main engine electrical starting and
electrical power supply to the deck network



AUXILIARY POWER UNIT SAFIR 5K/G Z8

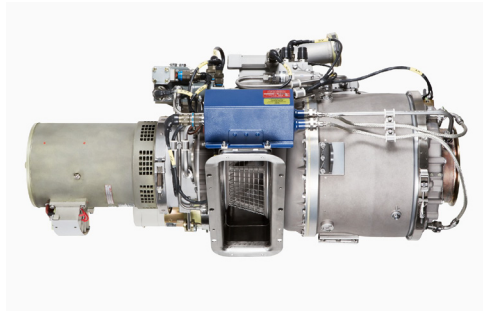

Main features

- › Continuous operation lasting 6 hours
- › High reliability of APU operations
- › Long service life
- › Simple maintenance
- › Ecological fuel drainage
- › Optimized signalization of fuel-oil system

Standard completion

- › Fuel-oil system
- › Control system
- › Connection cables
- › Ignition unit
- › Electric starter with an over running clutch

Technical parameters

Nominal power output	40 kVA	40 kVA
Electrical power supply	3 x 115 V / 200V / 400 Hz	3 x 115 V / 200V / 400 Hz
Fuel consumption	55 kg/h	121 lb/hr

Dimensions and weight

Height x width - included air bleed system	398 x 520 mm	15.6 x 20.4 in
Length - without generator	638 mm	25.1 in
Weight - without generator	48.5 kg	107 lb

Operating range

Max. altitude	6,000 m	19,700 ft
Temperature range	-55 °C to +60 °C	-67 °F to +140 °F